

**POLYTAC® X USB // POLYTAC® X**  
**MULTI-FUEL, HANDHELD TACTICAL FLASHLIGHT**

- DESCRIPTION:** The PolyTac® X USB and PolyTac® X are multi-fuel tactical flashlights that can use either one Streamlight SL-B26® protected Li-Ion USB rechargeable battery pack or two CR123A disposable batteries. The PolyTac X USB is a complete rechargeable system that comes packaged with a charge cord and an SL-B26® battery pack that features an integrated micro-USB charge port. The PolyTac X comes packaged with two CR123A batteries. Both versions feature a rocky stipple grip texture, a two-way pocket clip, and a TEN-TAP® programmable tail switch.
- CASE MATERIAL:** High-impact, super tough nylon polymer for exceptional durability and a sure grip. All openings O-ring or gasket-sealed. Available in black, yellow, or coyote.
- DIMENSIONS:** Length: 5.46 in (13.9 cm)      Body Diameter: 1.00 in (2.54 cm)  
 Head Diameter: 1.25 in (3.18 cm)      Major Diameter: 1.35 in (3.43 cm)
- WEIGHT:** PolyTac® X USB: 4.9 oz (139 g) with one (1) SL-B26® protected Li-Ion USB rechargeable battery pack.  
 PolyTac® X: 4.4 oz (125 g) with two (2) CR123A batteries.
- LENS:** Glass lens; O-ring sealed.
- LIGHT SOURCE:** White LED, impervious to shock with a 50,000-hour lifetime.
- LIGHT OUTPUT:** See charts. Regulated output for consistent lumen performance over entire battery life.
- RUN TIME:** See charts for specific battery type. All claims to 10% of initial lumen output.
- ON/OFF:** Multi-function, push-button tactical tail switch. One-handed operation of momentary, variable intensity, or strobe mode. TEN-TAP® programmable switch allows for user selection of one of three different programs: high/strobe/low (factory default), high only, or low/medium/high.
- BATTERY:** One (1) Streamlight SL-B26® protected Li-Ion USB rechargeable battery pack with on-board safety control, 2600mAh, rechargeable up to 500 times. Recharges in 5 hours.  
 Two (2) 3-volt CR123A lithium batteries with a storage life of 10 years.  
**WARNING - EXPLOSION RISK, BURN, AND FIRE HAZARD.** Do not use SL-B9™ batteries in firefighting apparatus or fire situations. Do not expose SL-B9™ battery to temperatures greater than 140 °F (60 °C).


**FEATURES:**


- High-power LED for extreme brightness.
- Multi-fuel; accepts a Streamlight SL-B26® battery pack or CR123A batteries.
- IPX7-rated design; waterproof to 1 meter for 60 minutes.
- 3-meter impact resistance tested.
- Superior grip texture for sure grip.
- TEN-TAP® programmable switch allows for user selection of one of three different programs.
- Removable two-way pocket clip.
- Serialized for positive identification.

**APPROVALS:**  Meets applicable United Kingdom and European Community Directives.









**NFPA** Flashlight meets 500° F requirements of NFPA 1971-8.6 (2018).

**TAA** Trade Agreement Act Compliant.

 CEC Compliant (USB model only).


**WARRANTY:** Streamlight's Limited Lifetime Warranty

**ACCESSORIES:** Holster, safety wands, colored flip lenses, charge cords

	CR123A Lithium Batteries				SL-B26® USB Battery Pack			
	FL1 STANDARD	HIGH	MEDIUM	LOW	FL1 STANDARD	HIGH	MEDIUM	LOW
<b>OUTPUT</b>		600 LUMENS	260 LUMENS	35 LUMENS		600 LUMENS	260 LUMENS	35 LUMENS
<b>RUN TIME</b>		2h 45min	5h 30m	34h		3h 30min	5h 45m	36h
<b>DISTANCE</b>		205m	135m	50m		205m	135m	50m
<b>INTENSITY</b>		11,485cd	4,930cd	675cd		11,485cd	4,930cd	675cd

Strobe Run Time: 5h 30m

Strobe Run Time: 8h

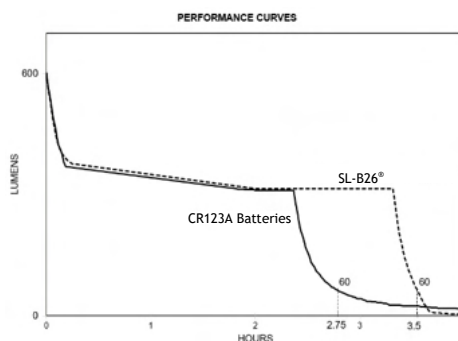

All performance claims tested to ANSI/PLATO FL1-2019 Standard