




SIDEWINDER COMPACT[®]

COMPACT, HANDS-FREE MILITARY FLASHLIGHT

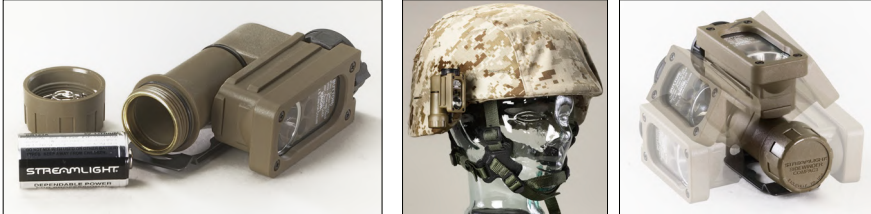

Available Colors:

Super lightweight and versatile hands-free helmet light clips onto helmet or MOLLE in seconds. 185° articulating head aims the beam. Designed for easy mode selection even with gloved hands.

KEY FEATURES

- Pull-to-turn locking rotary knob prevents accidental mode changes
- Push-button switch enables/disables selected lighting source starting at low intensity and progressing to the brightest intensity in 4 steps
- Double-click of button initiates high intensity strobe of selected light source
- Cord attachment holes provided in battery compartment cover capable of supporting 25 lbs of load
- Tethered battery compartment cap facilitates battery replacement in the dark without losing cap

OUTPUT

LED TYPE	LIGHT OUTPUT	LOW 5% OUTPUT	MED 1 25% OUTPUT	MED 2 60% OUTPUT	HIGH 100% OUTPUT	STROBE 100% OUTPUT
WHITE	55 lumens	60 hrs	28 hrs	9 hrs	5.25 hrs	9 hrs
5MM IR	25mW/sr (min) radiant intensity	100 hrs+	48 hrs	24 hrs	14 hrs	24 hrs
5MM RED	1 lumen	100 hrs+	48 hrs	24 hrs	14 hrs	24 hrs
5MM BLUE	1.8 lumens	100 hrs+	36 hrs	18 hrs	10 hrs	18 hrs
5MM GREEN	4.5 lumens	100 hrs+	36 hrs	12 hrs	10 hrs	18 hrs

ITEM NUMBERS

Description	UPC	Item #
MILITARY MODEL (WHITE, RED, BLUE, IR LEDS)		
Sidewinder Compact Military - Includes (1) CR123A lithium battery - Clam	080926-14104-9	14104
Sidewinder Compact Military - Includes helmet mount and (1) CR123A lithium battery - Clam	080926-14102-5	14102

see reverse side for additional item numbers

BATTERY

- Uses (1) CR123A lithium battery
- Lithium battery allows for extended operation in extreme temperature environments (-40F to 150F)
- Tactile battery polarity indication on body allows replacement of cells in dark environment

MATERIAL/DURABILITY

- High impact super-tough nylon case offers exceptional durability and weather resistance
- All openings are O-ring sealed. Unbreakable polycarbonate lens with scratch-resistant coating. Gasket sealed
- IPX7 waterproof to 1m for 30 minutes

DIMENSIONS

LENGTH: 3 in (7.62c m)

WEIGHT: 2.4 oz (68g)
W/BATTERY

WARRANTY

Streamlight warrants its Sidewinder (excepting batteries) will be free from manufacturing defects under normal use for 12 months after purchase. During the warranty period, at its sole discretion, Streamlight will repair or replace any defective part or product.

ITEM NUMBERS

Description	UPC	Item #
AVIATION MODEL (WHITE, GREEN, BLUE, IR LEDS)		
Sidewinder Compact Aviation - Includes (1) CR123A lithium battery - Mailer	080926-14122-3	14122
Sidewinder Compact Aviation - Includes helmet mount and (1) CR123A lithium battery - Mailer	080926-14120-9	14120

ACCESSORIES

	Description	UPC	Item #	NSN
	Helmet Mount	080926-14055-4	14055	5340-01-576-8559
	Rail Mount for Helmet	080926-14057-8	14057	8470-01-633-3996
	Elastic Headstrap	080926-14059-2	14059	6230-01-613-4313
	Night Vision Goggle Mount - Tactical (works with DoD, NATO, & ISAF combat helmets)	080926-14155-1	14155	---
	Night Vision Goggle Mount - Aviation (works with HGU-84 rotary wing aircrew helmets)	080926-14135-3	14135	---
	E-Mount (ACH, ECH, MICH, LWH compatible)	080926-14136-0	14136	5340-01-641-3930
	E-Mount Accessory Kit (Includes E-Mount, MOLLE Retainer and paracord)	080926-14137-7	14137	---
	Sidewinder Rescue Accessory Kit (Includes MOLLE Retainer and paracord)	080926-14304-3	14139	---
	Helmet Mount Kit - Helmet Mount, Headstrap and MOLLE plate	080926-14112-4	14112	---
	Rail Mount Kit -Rail Mount, Headstrap and MOLLE plate	080926-14113-1	14113	8415-01-691-0048
	Contour ARC Rail Mount	080926-14114-8	14114	---
	High Offset ARC Rail Mount	080926-14115-5	14115	---
	Hook and Loop Mount	080926-14073-8	14073	---
	MOLLE Retainer Replacement	080926-14030-1	14030	8415-01-691-0046
	Paracord	080926-14138-4	14138	
	Safety Wand - Glow in the Dark	080926-14902-1	14902	
	CR123A Lithium Batteries - 2 Pack CR123A Lithium Batteries - 12 Pack CR123A Lithium Batteries - 400 Pack CR123A Lithium Batteries - 6 Pack	080926-85175-7 080926-85177-1 080926-85179-5 080926-85180-1	85175 85177 85179 85180	---