



STREAMLIGHT STINGER® LED or STINGER DS™ LED
RECHARGEABLE FLASHLIGHT

MARKET APPLICATIONS: Law Enforcement, Sporting Goods, Security, Fire & Rescue, Hardware/Tool, Automotive, Industrial, Consumer

DESCRIPTION: Compact & powerful, the Stinger® LED and Stinger DS™ LED rechargeable flashlights offer 3 microprocessor controlled variable intensity modes, strobe mode and the latest in power LED technology. The Stinger DS™ LED includes a second independent easy to locate tactical tailcap switch. The combination of rechargeable batteries and the C4 LED results in one of the lowest operating costs of any flashlight made. C4 LED technology produces 2 to 3 times the output of previous LEDs.

CASE MATERIAL: 6000 series machined aircraft aluminum with non-slip rubberized comfort grip with anti-roll rubber ring.

DIMENSIONS: Stinger® LED Length: 8.41 in. (21.36 cm) Diameter: Major Diameter: 1.62 in. (4.11 cm)
Stinger DS™ LED Length: 8.85 in. (22.48 cm) Body Diameter: 1.17 in. (2.97 cm)

WEIGHT: Stinger® LED: 12.4 oz (352 grams)* Stinger DS™ LED: 12.8oz (364 grams)*

LENS: Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

LIGHT SOURCE: C4 LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: 18,000 candela peak beam intensity and up to 160 lumens measured system output. Deep-dish parabolic reflector produces a long range targeting beam with optimum peripheral illumination to aid in navigation. Optimized electronics provides regulated intensity.

ON/OFF: Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations. Stinger DS™ LED provides a second multi-function push-button tactical tailswitch where both switches offer full feature control independent of each other.

RUN TIME: High brightness: Up to 1.75 continuous hours to the 10% output level.
Medium brightness: Up to 3.50 continuous hours to the 10% output level.
Low brightness: Up to 6.75 continuous hours to the 10% output level.
Strobe: Up to 5.50 continuous hours.

BATTERY: 3-cell, 3.6 Volt Nickel-cadmium sub-C battery is rechargeable up to 1000 times.


CHARGING: Fits existing Stinger chargers. Steady charger fully recharges in 10 hours on 100V, 120V, 230V or 240VAC, or 12VDC. 2.5 hour fast charger or PiggyBack® charger models available.

FEATURES: C4 LED technology for extreme brightness.
LED Charge-continuity indicator on charger base.
Compact, snap-in charger mounts in any position.
Serialized for positive identification.

APPROVALS:** Most models meet applicable European Community Directives. **CE**

WARRANTY: Limited lifetime warranty.

OPTIONAL ACCESSORIES: Safety wands, ring holder, color filters, 5-unit bank charger, 2.5 hour fast charger, or Piggy-Back® charger that allows for simultaneous charging of light and battery.

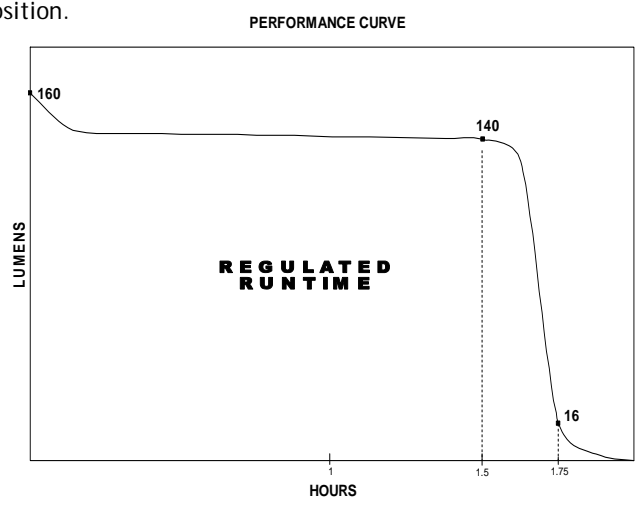

* With battery (included in purchase) ** See product for specific ratings.
Designed and Assembled In The USA.