


VANTAGE® HELMET-MOUNTED LIGHT

- DESCRIPTION:** Lightweight, compact, and low-profile, the Vantage® has been designed to easily attach above or below full brim fire and industrial helmets. The light features the latest in power LED technology combined with an ultra-bright blue safety taillight LED. Powered by lithium batteries, the LED technology produces 2 to 3 times the output of previous LEDs. Sealed for water-resistance.
- CASE MATERIAL:** 6000 series machined aircraft aluminum with black anodized finish.
High-impact, chemical-resistant engineering polymer LED housing.
- DIMENSIONS:** Length: 3.26 in (8.28 cm) Width: 1.47 in (3.73 cm) Height with clamp: 2.56 in (6.50 cm)
Height above/below mounting surface: 1.84 in (4.67 cm)
- WEIGHT:** 5.14 oz (145.7 g) with batteries (included in purchase)
- LENS:** High temperature, shock-mounted, impact-resistant BOROFLOAT® glass.
- LIGHT SOURCE:** LED technology, impervious to shock with a 50,000-hour lifetime.
470 nm ultra-bright blue safety taillight LED with a 100,000-hour lifetime.
- LIGHT OUTPUT:** 115 lumens measured system output; 7,000 candela peak beam intensity; 167m beam distance.
Textured parabolic reflector produces a smooth beam hotspot with optimum peripheral illumination to aid in navigation. Optimized electronics provide regulated intensity.
- ON/OFF:** Dual direction, easy access on/off switch located on rear of light.
- RUN TIME:** 6 continuous hours to 10% of initial lumen output.
- BATTERY:** Two (2) 3-volt CR123A lithium batteries with a storage life of 10 years.
WARNING - EXPLOSION RISK, BURN, AND FIRE HAZARD. Do not use SL-B9™ batteries in firefighting apparatus or fire situations. Do not expose SL-B9™ battery to temperatures greater than 140 °F (60 °C).
- FEATURES:** LED technology for extreme brightness.
IPX7-rated design; waterproof to 1 meter for 30 minutes.
Swivel clamp and insertable 5° angle adjuster to optimize beam location.
Ultra-bright blue safety taillight LED visible in heavy smoke.
Serialized for positive identification.
- WARRANTY:** Streamlight's Limited Lifetime Warranty
- APPROVALS:** **CE UK CA** Meets applicable United Kingdom and European Community Directives.
NFPA Flashlight meets 500° F requirements of NFPA 1971-8.6 (2018).
- ACCESSORIES:** N/A

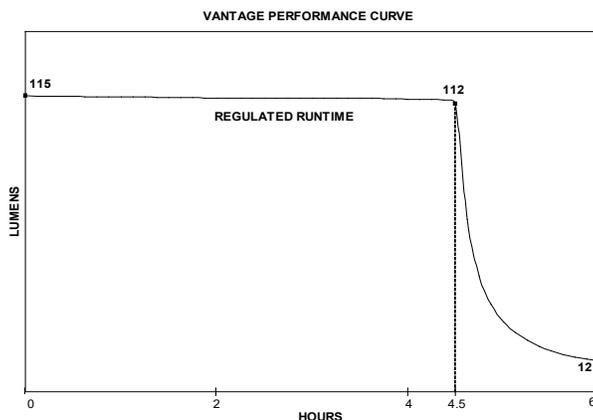

BOROFLOAT® is a registered trademark of SCHOTT AG.
All performance claims to ANSI/NEMA FL1-2009 Standard

Issued: 04/04/2008
Revised: 04/16/2024

Rev: 7

Assembled in the USA.

Document #249