

ENDURO® PRO AAA BATTERY-POWERED HEADLAMP

MARKET
APPLICATIONS: Outdoor, Sporting Goods, Automotive, Hardware/Do-It-Yourself, Industrial, Emergency Medical Services, Safety, Gift, Consumer, Pest Control, Boating

DESCRIPTION:

The Enduro® Pro AAA Headlamp features two C4® power LEDs, and two red or two green LEDs. There are a total of eight output modes. Three levels each for spot and flood and two for the night vision red or green LEDs. Battery replacement is effortless, just snap open the rear cover, no tools required. The new headband design is optimized for easy cleaning.

CASE MATERIAL:

Tough Polycarbonate thermoplastic construction with elastomer over mold. Easy color change from Black to Safety Yellow or Coyote and back with the snap on color cover.

DIMENSIONS:

Height: 1.85 in. (4.70 cm) Width: 2.19 in. (5.56 cm) Front to Back: 1.45 in (3.68 cm)

WEIGHT:

3.4 oz (96.38 grams) with Alkaline batteries. 3.0 oz (85.04 grams) with Lithium batteries

LENS:

Unbreakable polycarbonate lenses.

LIGHT SOURCE:

Two (2) White C4® LED technology, impervious to shock with a 50,000 hour lifetime, and two Red LEDs, or two Green LEDs on the Coyote colored model.

LIGHT OUTPUT:


See charts for white light.

Red Output

 Red Low - 0.08 Lumens
 Red High - 0.37 Lumens

Green Output

 Green Low - 0.25 Lumens
 Green High - 1.25 Lumens

ON/OFF:

Multi-function push button switch.

White Output Modes = Low, Medium, High and Off

Red or Green Output Modes = Low, High, and Off

To change the lights beam from Spot to Flood, or to RED or GREEN LEDs, Turn on the light, then press and hold the on/off button for two seconds until the light changes to flood. Release the button. To go to the Red or Green LEDs repeat this process. To get back to the Spot beam, repeat the press and hold process again.

Switching Output Modes: Pushing the button within 1.5 seconds of the last button push will change the light mode. You may sequence through all light levels and then to off.

NOTE: If you wait more than two seconds between button pushes, the next press of the button will turn the light off.

RUN TIME:


See charts. All claims to 10% of initial lumen output.

BATTERY:

Three (3) "AAA" size, Alkaline batteries or (3) AAA lithium cells.

FEATURES:


C4® LED technology for extreme brightness.

45° tilting head

IPX4 rated for water resistant operation.

2 meter impact resistance tested.

WARRANTY:


Streamlight's Limited Lifetime Warranty

APPROVALS:

 Meets applicable European Community directives. **CE**
OPTIONAL
ACCESSORIES:

Rubber head strap

	SPOT				FLOOD			
	FL1 STANDARD	HIGH	MEDIUM	LOW	FL1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		200 LUMENS	75 LUMENS	25 LUMENS		135 LUMENS	45 LUMENS	15 LUMENS
RUNTIME		6h	14h	38h		6h	14h	38h
DISTANCE		95m	57m	35m		29m	18m	9m
INTENSITY		2,250cd	825cd	300cd		210cd	80cd	20cd

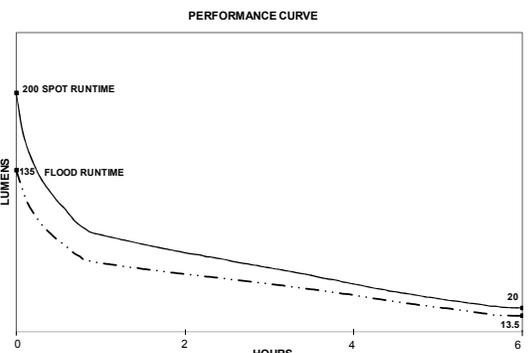

All performance claims tested to ANSI/PLATO FL1-2016 Standard

Issued: 07/13/2017

Revised: 12/18/2017 Rev: 2

Made in China.

Document #303