

**POLYTAC® // POLYTAC® HP**  
**LITHIUM BATTERY POWERED POLYMER FLASHLIGHT**

**DESCRIPTION:** The PolyTac® is a bright and compact personal polymer light available with the latest in power LED technology and three different user-selectable programs. The light features a superior grip texture to provide a comfortable but slip-resistant feel. Packaged with a removable pocket clip.

**CASE MATERIAL:** High-impact, super tough nylon polymer for exceptional durability and a sure grip. All openings O-ring or gasket sealed. Available in black, yellow, or coyote.

**DIMENSIONS:** **PolyTac®:** Length: 5.34 in (13.56 cm)  
 Body Diameter: 1.00 in (2.54 cm)  
 Head Diameter: 1.25 in (3.18 cm)  
 Major Diameter: 1.36 in (3.45 cm)  
**PolyTac® HP:** Length: 5.90 in (14.98 cm)  
 Body Diameter: 1.00 in (2.54 cm)  
 Head Diameter: 1.68 in (4.26 cm)

**WEIGHT:** **PolyTac®:** 4.2 oz (121 g) with battery      **PolyTac® HP:** 5.2 oz (148 g) with battery

**LENS:** **PolyTac®:** Glass lens, O-ring sealed.  
**PolyTac® HP:** Unbreakable polycarbonate with scratch-resistant coating, O-ring sealed.


**LIGHT SOURCE:** LED technology, impervious to shock with a 50,000-hour lifetime.

**LIGHT OUTPUT:** See charts for specific model.

**RUN TIME:** See charts for specific model. All claims to 10% of initial lumen output. Strobe Run Time: 5h 30 min.

**ON/OFF:** Multi-function, push-button tactical tail switch. One-handed operation of momentary, variable intensity, or strobe mode. TEN-TAP® programmable switch allows for user selection of one of three different programs: high/strobe/low (factory default), high only, or low/medium/high.

**BATTERIES:** Two (2) 3-volt CR123A lithium batteries with a shelf life of 10 years.  
**WARNING - EXPLOSION RISK, BURN, AND FIRE HAZARD.** Do not use SL-B9™ batteries in firefighting apparatus or fire situations. Do not expose SL-B9™ battery to temperatures greater than 140 °F (60 °C).




**FEATURES:** LED Solid State Power Regulation provides maximum light output throughout battery life. IPX7-rated design; waterproof to 1 meter for 30 minutes. 3-meter impact resistance tested. Superior grip texture for sure grip. TEN-TAP® programmable switch allows for user selection of one of three different programs. Removable pocket clip. Serialized for positive identification.

**APPROVALS:** **CE UK CA** Meets applicable United Kingdom and European Community Directives.  
**NFPA** PolyTac® meets the requirements of NFPA 1971-8.6 (2018).  
*Note: PolyTac® HP is not recommended for fire helmet mounting.*

**WARRANTY:** Streamlight's Limited Lifetime Warranty

**OPTIONAL ACCESSORIES:** **PolyTac®:** Holster, safety wands, colored flip lenses      **PolyTac® HP:** N/A

	POLYTAC®				POLYTAC® HP			
	FL1 STANDARD	HIGH	MEDIUM	LOW	FL1 STANDARD	HIGH	MEDIUM	LOW
<b>OUTPUT</b>		600 LUMENS	260 LUMENS	35 LUMENS		600 LUMENS	260 LUMENS	35 LUMENS
<b>RUN TIME</b>		2h 45min	5h 30m	34h		2h 45min	5h 30m	34h
<b>DISTANCE</b>		214m	140m	52m		297m	195m	72m
<b>INTENSITY</b>		11,500cd	4,900cd	675cd		22,000cd	9,500cd	1,300cd

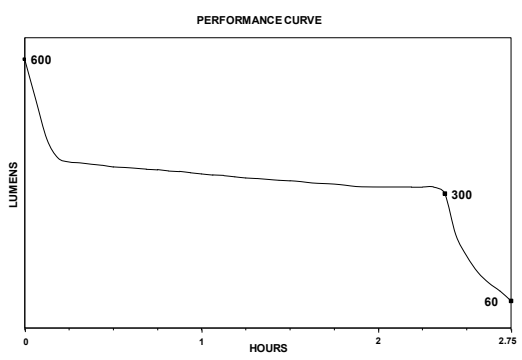

All performance claims tested to ANSI/PLATO FL1-2016 Standard