


The ProTac Rail Mount HL-X is a 50,000 candela long gun light featuring a fixed-mount for Picatinny rails. It uses either a remote switch with momentary/constant on operation or a standard push-button tail switch, and runs on either two CR123A lithium batteries or one SL-B26® USB battery pack.

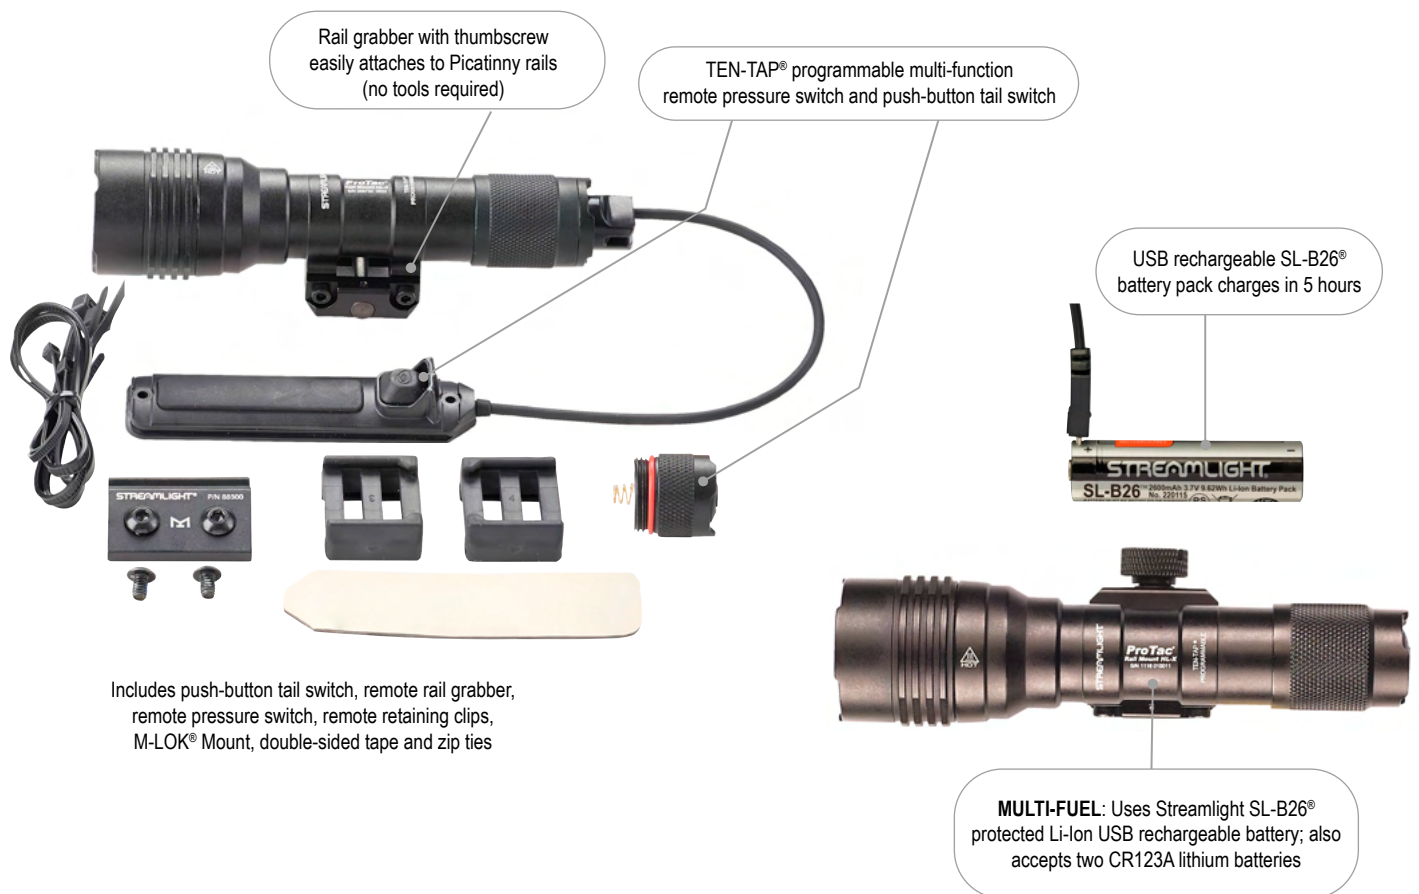

TEN-TAP® Programming: Choice of three operating modes: 1.) high/strobe; 2.) high only; 3.) low/high
<ul style="list-style-type: none"> <li>– High for maximum illumination: 1,000 lumens; 50,000 candela; 447m beam; runs 1.25 hours (CR123A); runs 1.75 hours (SL-B26®)</li> <li>– Low for extended run time: 60 lumens; 3,100 candela; 111m beam; runs 21 hours (CR123A); runs 24 hours (SL-B26®)</li> <li>– Strobe for signaling or disorienting: runs 2.5 hours (CR123A); runs 3.5 hours (SL-B26®)</li> </ul>
One-handed snap-on & tighten interface keeps hands away from muzzle when attaching/detaching
Integrated rail clamp attaches to MIL-STD-1913 rails and M-LOK compatible rail systems

Durable, anodized aluminum construction with impact-resistant tempered glass lens
IP67 waterproof to 1 meter for 30 minutes (with standard button switch) IP54 water-resistant (with remote pressure switch)
5.43" (13.8 cm); 6.4 oz. (181.4g) with CR123A batteries; 6.9 oz. (195.6g) with Streamlight SL-B26® battery pack
Limited Lifetime Warranty Visit <a href="http://streamlight.com">streamlight.com</a> for full warranty information
#88066 - ProTac Rail Mount HL-X with lithium batteries - Box #88071 - ProTac Rail Mount HL-X USB with SL-B26® battery pack - Mailer

All rights reserved. M-LOK® is a registered trademark of Magpul Industries Corp.