

TL-2®/ TL-2® LED LITHIUM POWER TACTICAL FLASHLIGHT

MARKET
APPLICATIONS: Law Enforcement, Tactical Operations, Security

DESCRIPTION:

The TL-2® is a high performance CR123A Lithium battery-powered flashlight available with either a C4® LED or a Xenon bulb with adjustable focus. Removable spring steel pocket clip and adjustable wrist lanyard included. (Model also available with IR LED.)

CASE MATERIAL:

6000 Series machined aircraft aluminum with anodized finish. Available in black.

DIMENSIONS:
TL-2®:

 Length: 4.90 in. (12.45 cm)
 Head Diameter: 1.25 in. (3.18 cm)
 Barrel Diameter: 0.90 in. (2.29 cm)

TL-2® LED:

 Length: 5.65 in. (13.33 cm)
 Head Diameter: 1.25 in. (3.18 cm)
 Barrel Diameter: 0.90 in. (2.29 cm)
 Diameter at Tri-Lobe Anti-Roll Flange: 1.44 in. (3.66 cm)

WEIGHT:
TL-2®: 4.2 oz (119 grams)*

TL-2® LED: 4.7 oz (129 grams)*

LENS:

High temperature glass lens, gasket sealed.

LIGHT SOURCE:
TL-2®: 6-Volt, high pressure Xenon gas filled bi-pin bulb with 30 hour lifetime. Spare bulb in lamp module.
TL-2® LED: C4®LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT:

See charts for specific model. LED models have optimized electronics for regulated intensity.

RUN TIME:

See charts for specific model. All claims to 10% of initial lumen output.

ON/OFF:

Tailcap push button provides one handed momentary or constant "on" operation.

BATTERIES:

Two (2) 3 Volt CR123A Lithium batteries with a shelf life of 10 years.

FEATURES:


C4®LED technology (LED only).

Adjustable head allows for variable spot-to-flood focus (Xenon only).

IPX4 rated design; water resistant operation.

3 meter impact resistance tested (LED only).

1 meter impact resistance tested (Xenon only).

Solid State Power Regulation provides maximum light output throughout battery life (LED only).

Serialized for positive identification.

Removable pocket clip.

Anti-roll head (LED only).

APPROVALS:


 Meets applicable European Community Directives. 
WARRANTY:

Streamlight warrants this product to be free of defect, including the LED, for a lifetime of use. We will repair, replace or refund the purchase price, at our option, of any Streamlight product that does not work as a result of a manufacturing defect for as long as you own it. This limited lifetime warranty excludes abuse, batteries, bulbs, switches and electronics. Switches and electronics have a two (2) year warranty with proof of purchase.

OPTIONAL
ACCESSORIES:

Color Filters and IR "Flip Lens" cover, Holster, Rail mount, Remote switch.

	TL-2®		TL-2® LED	
	FL 1 STANDARD	TL-2	FL 1 STANDARD	TL-2 LED
OUTPUT		78 LUMENS		160 LUMENS
RUNTIME		1h 20min		3h 30min
DISTANCE		178m		190m
INTENSITY		7,900cd		9,000cd

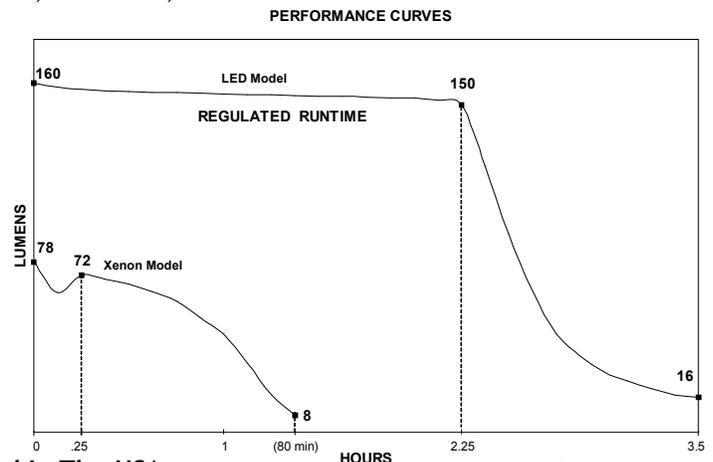

*With batteries; batteries included in purchase

All performance claims tested to ANSI/NEMA FL1-2009 Standard

Issued: 10/01/2004

Revised: 12/03/2010 Rev: 6

Assembled In The USA.
Document #133