

## STINGER® 2020 S RECHARGEABLE LED FLASHLIGHT

- DESCRIPTION:** Compact and extremely powerful, the Stinger® 2020 S features 2,000 lumens with an intensity mode selector switch for high, medium, and low. It also features a textured body for enhanced grip and a body-mounted on/off switch with a battery status indicator. It is powered by a Stinger 2020 S Li-Ion rechargeable battery pack, which can be charged inside the light or via PiggyBack® charger.
- CASE MATERIAL:** Premium quality aluminum alloy body and non-slip rubberized comfort side panels.
- DIMENSIONS:** Length: 7.69 in (19.53 cm) Major Diameter: 1.62 in (4.11 cm)
- WEIGHT:** 12.2 oz (346 g) with battery pack.
- LENS:** High temperature, shock-mounted, impact-resistant BOROFLOAT® glass; gasket-sealed.
- LIGHT SOURCE:** High-power white LED, impervious to shock with a 50,000-hour lifetime.
- LIGHT OUTPUT:** See chart. Optimized electronics provide regulated intensity. Deep-dish parabolic reflector produces a concentrated beam with optimum peripheral illumination.
- ON/OFF/INTENSITY:** Momentary or constant on operation. Body-mounted, push-button on/off switch designed for extremely long life, tested at 1 million actuations. Three-position slide switch to allow for selection of high, medium, or low intensity modes. Double tap on/off switch to activate strobe mode.
- RUN TIME:** See chart. All claims to 10% of initial lumen output. Strobe: 3.25 continuous hours.
- BATTERY:** (1) Stinger 2020 S protected Li-Ion rechargeable battery pack with on-board safety control circuit, 5,200mAh, rechargeable up to 500 times.
- CHARGE HOLDERS:** Fits existing Stinger® chargers. Smart charger fully recharges within 6 hours (12VDC input). Available PiggyBack charger provides power to a second battery pack simultaneously.
- CHARGE CORDS:** Streamlight universal AC input voltage, 5V/1A USB or 12V/1.2A output charge cords available with IEC Type A (US & Japan), Type C (Euro), Type G (UK) or Type I (Australia) plugs. 12VDC or direct wire automotive cords. Streamlight USB cord.

**FEATURES:**


- High-power LED for extreme brightness. Intensity selector switch indicates mode at a glance.
- Ergonomic anti-roll body design with textured grip.
- Multiple charging options.
- IPX7-rated; waterproof operation to 1 meter submersion. *Not a dive light or for underwater use.*
- 2-meter impact resistance tested.
- Serialized for positive identification.
- LED charge-continuity indicator on charger base.
- Snap-in, PiggyBack charger mounts in any position.

**APPROVALS:**





- CE UK** Meets applicable United Kingdom and European Community Directives
- BC** CEC Compliant
- TAA** Trade Agreement Act-Compliant


**WARRANTY:**

Streamlight's Limited Lifetime Warranty

**OPTIONAL ACCESSORIES:**

Safety wands, holster, color filters, 5-unit bank charger, smart charger, AC adapters

	FL 1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		2,000 LUMENS	850 LUMENS	100 LUMENS
RUN TIME		2h	4h	24h
DISTANCE		315m	200m	70m
INTENSITY		25,000cd	10,000cd	1,200cd

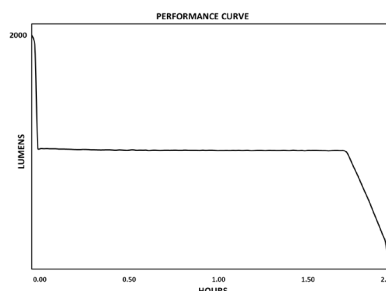

All performance claims tested to ANSI/PLATO FL1-2019 Standard  
All rights reserved. BOROFLOAT® is a registered trademark of SCHOTT AG.

Issued: 9/10/2024  
Revised:

Rev:

Assembled in the USA.

Document #401